



Geoscanners AB®



GPR SURVEY TRAILER USAGE

Please follow the instructions below to assemble and use the GPR survey trailer in the field.

Step 1



Set rear part on the ground with the antenna holders looking upwards

Step 2



Insert the antenna holders into the antenna holder connectors

Step 3



Make sure both antenna holders are firmly attached and secured

Step 4



Rear part with antenna holder ready for antenna insertion

Step 5



Insert the antenna into the antenna holders

Step 6



Fasten the antenna to the antenna holders

Step 7




Attach the trailer coupler to the hitch ball

Step 8



Insert the antenna holders into the front antenna holder connectors

Step 9

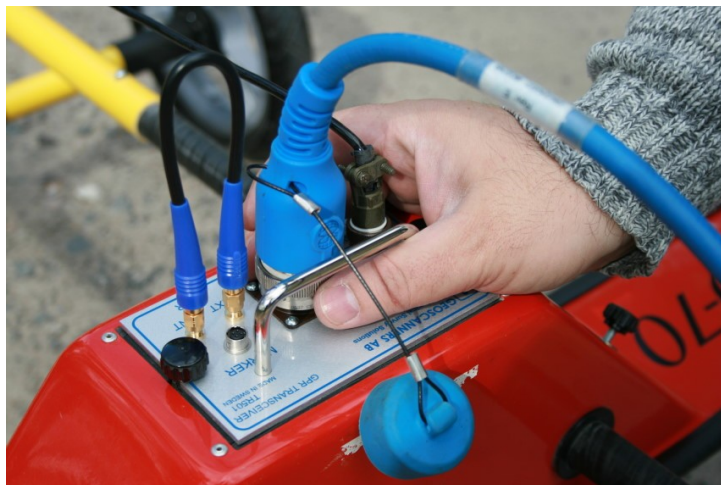

Attach the control cable and the survey wheel cable

Step 10



Pay particular attention to the arrangement of the survey wheel cable

Now your GPR survey trailer should be ready to use. If in need of advise please do not hesitate to contact us at Geoscanners AB. **Have a successful survey!**

